



Commercial Specification

UltraFlo StreamLine Series

Model Number- ULTRP-(8)S Manifold

PRODUCT DESCRIPTION

- UltraFlo single temperature faucet manifold
- Controls up to 8 faucets
- One 3/4" incoming water supply
- Single 3/8" supply line needed for each faucet
- Must be used with ASSE 1070 device to regulate temperature
- 16 gauge powder coated enclosure with tamper proof cover
- Can be either surface mounted or recessed
- Fits a 24" on center opening

OPERATION

- 12 Volt Solenoid Valve
- UL Listed Power Source
- Lead free water ways
- 3/8" Push to connect fitting on water Outlets

PERFORMANCE SPECIFICATION

- Rated operating pressure 30-120PSI
- Rated operating temperature : 40-140 Degrees F
- 1/2" port size, rated 4.6 GPM, PSI Drop = 4.2 PSI at Port

CODES & STANDARDS

- Meets ASME A112.18.1/CSA B125.1
- ADA Compliant
- LEED Compliant

MODEL NUMBER VARIATIONS:


Number equals faucet count

ULTRP-8S-BA= Optional Bellows type hammer arrestor

ULTRP-8S-HA= Optional Standard hammer arrestor

WARRANTY

- Limited Lifetime Faucet Warranty
- 1 Year Limited Electronics and Warranty

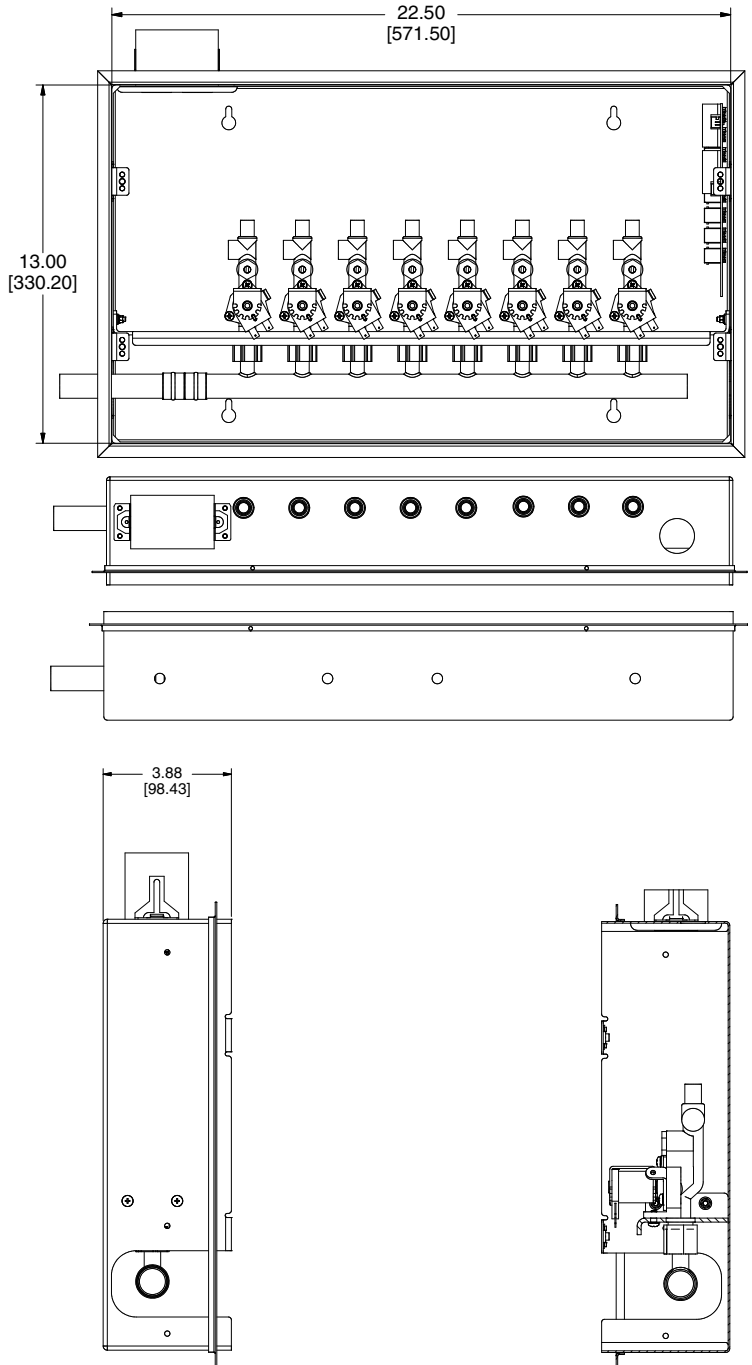

Made in USA



Project / Customer Name: _____

Approval: _____

Date: _____

1776 Mentor Avenue | Cincinnati, Oh. 45212

www.goultraflo.com

800.749.4468

12/2015